
This ensures that the deck holds a warm temperature during the winter.



The abutment detail of a flat roof is vital in order to prevent moisture penetration.

Similar to the abutment of a lean-to-roof, Lead flashing is chased into the external block, allowing it to overlap the lead upstand coming from the tiles.

Stepped DPC across the cavity ensures that any moisture that penetrates the external block will not travel down the cavity.

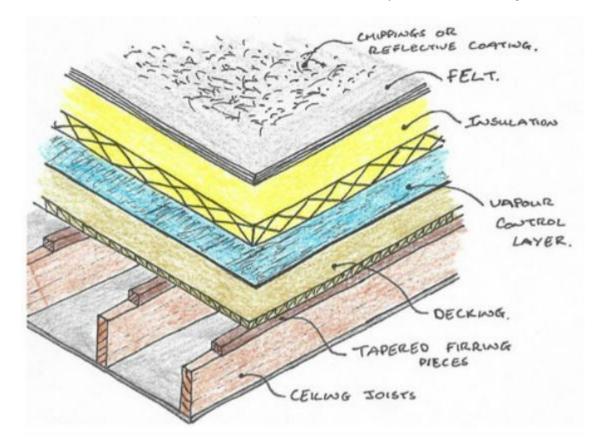